

AX19B Omni MIMO Series M2M IoT Antenna Specifications – L-Bracket Mount	
Multi-Carrier MIMO 4G LTE CBRS 5G NR / MIMO Multi Band WiFi 6 (2.4GHz~6GHz) WiFi HaLow (902~928Mhz) / Bluetooth (2.4GHz) * Contact Us For AX19B HaLow WiFi Configuration Options	
4G LTE CBRS 5G NR Frequency Range Bluetooth (2.4GHz) WiFi 6 Frequency Range	617-960MHz / 1710-6000MHz 2.4-2.5GHz / 4.9-6GHz (Concurrent)
4G CBRS 5G NR Avg. Peak Gain: <i>Isotropic</i> WiFi / Bluetooth Avg. Peak Gain: <i>Isotropic</i>	(3.5dBi) 617-960MHz / (6dBi) 1710-3800MHz / (7dBi) 4900-6000MHz / (5dBi) CBRS 3.5GHz (9dBi) 2.4~6GHz / (4dBi) WiFi HaLow 902~928Mhz * Contact Us For AX19B HaLow WiFi Configuration Options
Typical Efficiency 4G 5G Elements	617-960MHz >70% 1710-3800MHz >70% 4900-6000MHz >85%
Typical Efficiency WiFi Elements	>70%
Isolation 4G 5G Elements Isolation WiFi / Bluetooth Elements	>10dB >12dB
Correlation Co-efficient 4G 5G Elements Correlation Co-efficient WiFi / BT Elements	<0.2 <0.1
Horizontal Half Power Beamwidth	360° / 360°
Vertical Half Power Beamwidth	70° / 35°
VSWR	≤2.0 / ≤2.0
Nominal Impedance	50Ω
Polarization	MIMO 2 x Vertical Omni Directional
Max. Power	50W
Mechanical / Environmental Specifications	
Radome	High Impact Polycarbonate Height: 8.6" / 218mm – Diameter: 2.4" / 60mm
16ft Coax Cables 1ft Coax Cables	2 x 16ft AGA200 Coax Cables 2 x 1ft AGA200 Coax Cables (Custom Length Coax Cable Options are Available. Contact us for details)
Connector Types	All Standard RF Connectors Available (Including FAKRA Connector Ends)
Mount Type	Includes Mounting Hardware Tilt L-Bracket Mount + U-Bolt Set
Mounting Mast Diameter	1.5"~2" / 40mm~50mm
Ingress Protection	IP69K
Wind Velocity	120 MPH
Operating Temp	-40° / +80°C (-40° / +176°F)
Net Weight	1.5bs / 0.7kg Includes Mounting Hardware

Supported Cellular Service Provider Networks	
Verizon	Verizon 4G LTE 5G NR Bands 4G LTE: B2 B4 B5 B13 B46 B48 B66 (CBRS B48) 5G NR: N2 N5 N66 N77 Carriers (MVNOs) using Verizon Network: Reach Mobile, Red Pocket Mobile, Spectrum Mobile, Ting Total, Tracfone, Twigby, US Mobile, Visible, Xfinity Mobile
T-Mobile	Mobile 4G LTE 5G NR Bands 4G LTE: B2 B4 B5 B12 B25 B26 B41 B48 B66 B71 (CBRS B48) 5G NR: N25 N41 N66 N71 Carriers (MVNOs) using T-Mobile Network Mint Mobile, TextNow, Lyca Mobile, Metro, Red Pocket Mobile Republic Wireless, Simple Mobile, Ting, Tracfone, US Mobile
AT&T	AT&T 4G LTE 5G NR Bands 4G LTE: B2 B4 B5 B12 B14 B17 B29 B30 B48 B66 (CBRS B48) GSM: 1900MHz 5G NR: N2 N5 N66 N77 Carriers (MVNOs) using AT&T Network Cricket Wireless, Net 10 Wireless, Red Pocket Mobile, Straight Talk
Supported Cellular Bands	
5G NR Bands	n1 n2 n3 n5 n7 n8 n12 n13 n14 n18 n20 n25 n26 n28 n29 n30 n38 n40 n41 n48-CBRS n66 n71 n75 n76 n77 n78 n79 C-band
4G LTE Bands	B1 B2 B3 B4 B5 B7 B8 B12 B13 B14-FirstNet B17 B18 B19 B20 B25 B26 B28 B29 B30 B32 B38 B39 B40 B41 B42 B43 B46-LAA B48-CBRS B66 B71
3G Bands	B1 B2 B3 B4 B5 B6 B8 B9 B19
Supported WiFi IEEE Standards	
WiFi 1-6	WiFi 1 WiF 2 (802.11ba) WiFi 3 (802.11g) WiFi 4 (802.11n) WiFi 5 (802.11ac) WiiFi 6 6E (802.11ax)
* WiFi HaLow	WiFi HaLow (802.11ah) * Contact Us For AX19B HaLow WiFi Configuration Options

AX19B Omni MIMO Series Antenna
Dimensions: Antenna / Tilt L-Bracket Mount


60mm
2.4"



218mm
8.6"



Includes
Tilt L-Bracket Mount / U-Bolt Set

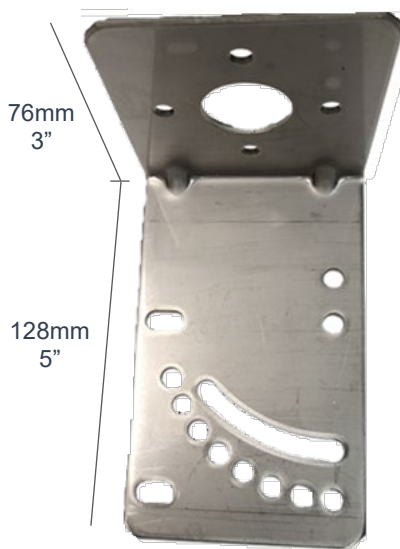

76mm
3"

AX19B Omni MIMO Series Antenna Configuration Options – L-Bracket Mount (2 x 16ft Coax Cables)

Configuration Options (SMA)

AX19B-16-2C: MIMO Cellular 4G 5G Antenna w/ 2 x 16ft AGA200 Coax Cables – 2 x SMA Male
AX19B--16-2W: MIMO WiFi 6 Antenna w/ 2 x 16ft AGA200 Coax Cables – 2 x RP SMA Male
AX19B-16-CW: Cellular 4G 5G / WiFi 6 Antenna w/ 2 x 16ft AGA200 Coax Cables – SMA Male / RP SMA Male
* Contact Us For AX19B HaLow WiFi Configuration Options

AX19B-16-SMA



Includes
2 x 16ft Coax Cables
L-Bracket Mount

AX19B-16-2C



AX19B-16-2W



AX19B-16-CW



AX19B Omni MIMO Series Antenna Configuration Options – L-Bracket Mount (2 x 16ft Coax Cables)

Configuration Options (FAKRA)

AX19BF-16-2C: MIMO Cellular 4G 5G Antenna w/ 2 x 16ft AGA200 Coax Cables – 2 x FAKRA
AX19BF-16-2W: MIMO WiFi 6 Antenna w/ 2 x 16ft AGA200 Coax Cables – 2 x FAKRA
AX19BF-16-CW: Cellular 4G 5G / WiFi 6 Antenna w/ 2 16ft x AGA200 Coax Cables – 2 x FAKRA
* Contact Us For AX19B HaLow WiFi Configuration Options

AX19BF-16-FAKRA




Includes
2 x 16ft Coax Cables
L-Bracket Mount

AX19BF-16-2C



AX19BF-16-2W



AX19BF-16-CW



AX19B Omni MIMO Series Antenna Configuration Options – L-Bracket Mount (2 x 1ft Coax Cables)


Configuration Options (NF)

AX19B-1-2C: MIMO 2 x Cellular 4G 5G Antenna w/ 2 x 1ft Coax Cables – 2 x NF
AX19B-1-2W: MIMO 2 x WiFi 6 Antenna w/ 2 x 1ft Coax Cables – 2 x NF
AX19B-1-CW: Cellular 4G 5G / WiFi 6 Antenna w/ 2 x 1ft Coax Cables – 2 x NF
* Contact Us For AX19B HaLow WiFi Configuration Options

AX19B-1-NF



AX19B-1-2C

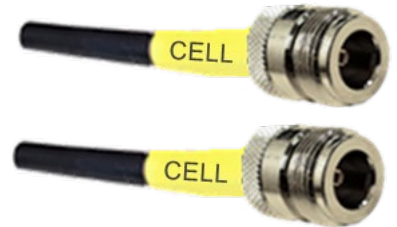

AX19B-1-2W



AX19B-1-CW

